


LIGHTEST, STRONGEST, SMARTEST

5 CTD WINCH

SPECIFICATIONS

PARAMETER	VALUE
Electrical Supply	40A @ 440V/3Ph/60Hz
SWL	2,100 kg @ 1.1 m/s [bare drum] 1,200 kg @ 2.0 m/s [full drum]
Particulars	5,000m capacity of 0.322" EM Cable 29 layers on large 20" drum core Brake capacity >2X SWL
Heave Compensation	+/- 2m @ 8 second period
Overall Dimensions	1.4m x 1.5m x 2.0m [L x W x H]

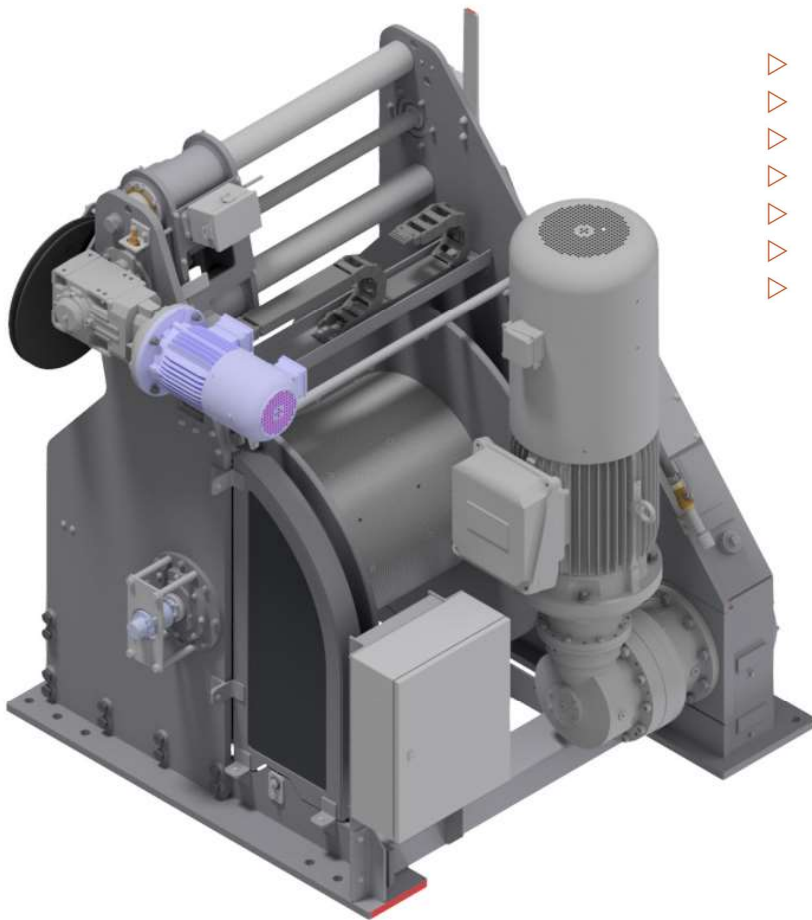

- ▷ Designed to DNV offshore lifting for sea state 6
- ▷ Active heave compensation capable [AHC]
- ▷ Failsafe brake
- ▷ Lebus style grooved drum
- ▷ Programmable right angle levelwind
- ▷ Auto dive to depth/recovery, auto with LARS
- ▷ Tension, speed, and payout monitoring & logs